




SPOOL VALVES

pilot operated or air operated, spool type
single/dual solenoid or air (mono/bistable function)
aluminium body, 1/4 to 1/2

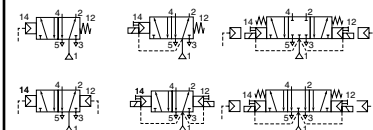

5/2
5/3
Series

551-552-553

FEATURES

- The monostable spool valves have TÜV-EXIDA certified IEC 61508 Functional Safety data and can be used up to SIL 4 (551/TÜV)-SIL 3 (552-553/EXIDA)
- The spool valves 5/2 and 5/3 have threaded port connections
- All the exhaust ports of this spool valve are connectable, providing better environmental protection, particularly recommended for sensitive areas such as clean rooms, and applications in the pharmaceutical and food processing sectors
- The valve offers environmental protection against the ingress of liquids, dusts or any other foreign matter (environmentally-protected construction)
- Epoxy moulded coil for general service applications
- The solenoid valves satisfy all relevant EC Directives

GENERAL

Differential pressure	2 - 10 bar [1 bar = 100 kPa]
Flow (Qv at 6 bar)	1/4 = 860 l/min (5/2) ; 760 l/min (5/3)(ANR) 3/8 = 3000 l/min (5/2, 5/3) 1/2 = 3800 l/min (5/2, 5/3)

fluids (*)	temperature range (TS)	seal materials (*)
air, inert gas, filtered	- 25°C to + 60°C	NBR (nitrile) + PUR (polyurethane)



MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

Body	Aluminium, black anodized
End covers	Glass-filled PA
Internal parts	Zamak, stainless steel, POM, aluminium
Seals	NBR + PUR
Core and plugnut	Stainless steel
Shading coil	Copper

AIR OPERATED SPECIFICATIONS

pipe size	orifice size	flow coefficient kv		operating pressure differential (bar)			prefix option	basic catalogue number
				min.	max. (PS)			
(*)	(mm)	(m³/h)	(l/min)		air (*)			
5/2 - Air pilot operated - spring return (monostable)								
1/4	6	0,75	12,5	2	10	10	-	❖551A117 (2)
3/8	12	2,49	41,5	2	10	10	-	❖552A117 (2)
1/2	13	3,15	52,5	2	10	10	-	❖553A117 (2)
5/2 - Air pilot operated and return (bistable)								
1/4	6	0,75	12,5	2	10	10	-	❖551A118
3/8	12	2,49	41,5	2	10	10	-	❖552A118
1/2	13	3,15	52,5	2	10	10	-	❖553A118
5/3 - W1 - pressure held, air pilot operated and return								
1/4	6	0,75	12,5	2	10	10	-	❖551A067
5/3 - W3 - pressure release, air pilot operated and return								
1/4	6	0,75	12,5	2	10	10	-	❖551A068

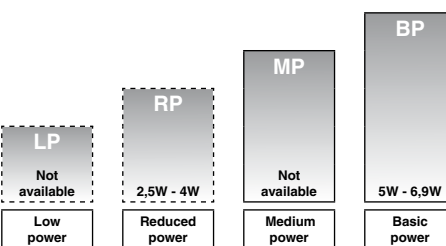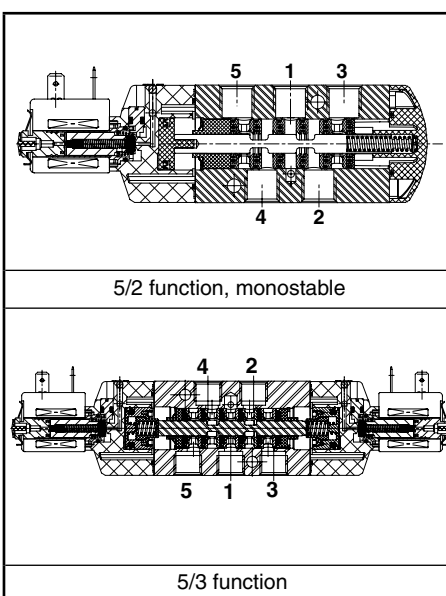

POWER LEVELS - cold electrical holding values (watt)

PILOT OPERATED SPECIFICATIONS 5/2

pipe size	orifice size	flow coefficient kv		operating pressure differential (bar)			power level	prefix optional solenoids				basic catalogue number	
				min.	max. (PS)			ATEX / IECEx		IP65			
(*)	(mm)	(m³/h)	(l/min)		air (*)		Ex d	Ex e mb	Ex mb		Ex i	SC	
5/2 - Solenoid air pilot operated - spring return (monostable)													
1/4	6	0,75	12,5	2	10	10	RP	-	-	-	-	●	❖551A017 (2)
1/4	6	0,75	12,5	2	10	10	RP	-	-	●	-	-	X❖551A017 20787 (2)
3/8	12	2,49	41,5	2	10	10	BP	-	-	●	-	●	❖552A017 (2)
1/2	13	3,15	52,5	2	10	10	BP	-	-	●	-	●	❖553A017 (2)
5/2 - Solenoid air pilot operated and return (bistable)													
1/4	6	0,75	12,5	2	10	10	RP	-	-	-	-	●	❖551A018
1/4	6	0,75	12,5	2	10	10	RP	-	-	●	-	-	X❖551A018 20787
3/8	12	2,49	41,5	2	10	10	BP	-	-	●	-	●	❖552A018
1/2	13	3,15	52,5	2	10	10	BP	-	-	●	-	●	❖553A018

❖ Select 8 for NPT ANSI 1.20.3 or select G for ISO G (228/1) ● Available feature - Not available
(2) Certified IEC 61508 Functional Safety data, use suffix "SL".

PILOT OPERATED SPECIFICATIONS 5/3

pipe size	orifice size	flow coefficient kv (m³/h) (l/min)		operating pressure differential (bar)			power level	prefix optional solenoids					basic catalogue number
				min.	max. (PS)			ATEX/IECEX				IP65	
					air (*)			Ex d	Ex e mb	Ex mb	Ex i		
(*)	(mm)				~	=	~/=			PV		SC	
5/3 - W1 - pressure held, solenoid air pilot operated and return													
1/4	6	0,66	11	2	10	10	RP	-	-	-	-	●	❖551A067
1/4	6	0,66	11	2	10	10	RP	-	-	●	-	-	X❖551A067 20787
3/8	12	2,49	41,5	2	10	10	BP	-	-	●	-	-	❖552A067
1/2	13	3,15	52,5	2	10	10	BP	-	-	●	-	-	❖553A067
5/3 - W3 - pressure release, solenoid air pilot operated and return													
1/4	6	0,66	11	2	10	10	RP	-	-	-	-	●	❖551A068
1/4	6	0,66	11	2	10	10	RP	-	-	●	-	-	X❖551A068 20787
3/8	12	2,49	41,5	2	10	10	BP	-	-	●	-	-	❖552A068
1/2	13	3,15	52,5	2	10	10	BP	-	-	●	-	-	❖553A068

❖ Select 8 for NPT ANSI 1.20.3 or select G for ISO G (228/1) ● Available feature - Not available

PREFIX TABLE

prefix							description	power level			
1	2	3	4	5	6	7		LP	RP	MP	BP
S	C			D	U		Dustproof ATEX (EN 50281-1-1)*	-	●	-	●
P	V						Encapsulated ATEX + IECEX (EN/IEC 60079 / 61241)*	-	●	-	●
S	C					X	Solenoid with spade plug connector (EN 60730)	-	●	-	●
							Other special constructions	-	●	-	●

SUFFIX TABLE

suffix					description	power level			
1	2	3	4	5		LP	RP	MP	BP
	G	D			Non-electrical, 2 GD c, construction safety, gas/dust-ATEX (EN 13463-5)	-	-	-	-
			M	S	Screw type manual operator	-	●	-	●
	S	L			Certified IEC 61508 Functional Safety data ⁽²⁾	-	●	-	●

● Available feature
- Not available

* ATEX solenoids are also approved according to EN/IEC 61241 (Dust) and EN 13463-1 (non electrical valves)

⁽²⁾ Not to use with MS suffix

PRODUCT SELECTION GUIDE

STEP 1

Select the fluid temperature range and seal material from the general table on page 1. Select basic catalogue number, including pipe thread identification letter. Refer to the specifications table on pages 1 and 2.

Example : G551A017

STEP 2

Select prefix (combination). Select the appropriate operator from the specifications table on page 1 and the prefix table on page 2. Select for this operator in the electrical characteristics table on page 3: the power level (RP, MP, BP), the type of electrical enclosure protection and the desired temperature class. The air operated version is without prefix.

Warning: The ambient temperature range of your application may not exceed the temperature range of your operator.

Do not use prefixes for air operated versions.

Example : SC

STEP 3

Select suffix (combination) if required. Suffix GD only applies for the air operated versions, do not use suffix MS.

Example : MS

STEP 4

Select voltage. Refer to standard voltages on page 3.

Example : 230V / 50Hz

STEP 5

Final catalogue / ordering number.

Example :

SC G551A017MS 230 V / 50 Hz

OPTIONS & ACCESSORIES

series	pipe size	exhaust protector (stainless steel)		
		(G)	(NPT)	(M)
551	1/4	34600419 ⁽³⁾	34600483 ⁽³⁾	-
552	3/8	34600478 ⁽³⁾	34600480 ⁽³⁾	-
553	1/2	34600479 ⁽³⁾	34600481 ⁽³⁾	-
551/552/553	M5	-	-	34600484 ⁽³⁾

⁽³⁾ Provided with "SL" suffix.

ORDERING EXAMPLES:

SC	G	551	A	017	MS	230V / 50 Hz
SCDU	G	551	A	018		115V / 50 Hz
PV X8		551	A	018	20787	115V / 50 Hz
SC	G	552	A	017	MS	24V / DC
	G	553	A	118		
	G	551	A	118	GD	
	G	551	A	117	GD SL	
	SC	G	551	A	017	SL

prefix — pipe thread — basic number — voltage — suffix

EXPLANATION OF TEMPERATURE RANGES OF SOLENOID VALVES

Valve temperature range	The valve temperature range (TS) is determined by the selected seal material, the temperature range for proper operation of the valve and sometimes by the fluid (e.g. steam)
Operator ambient temperature range	The operator ambient temperature range is determined by the selected power level (LP, RP, MP or BP) and the ATEX safety code
Total temperature range	The temperature range of the complete solenoid valve is determined by the limitations of both temperature ranges above

ELECTRICAL CHARACTERISTICS

Coil insulation class	F
Electrical safety	IEC 335
Standard voltages	DC (=) 24V - 48V AC (~) 24V - 48V - 115V - 230V/50Hz; other voltages and 60Hz are available on request

prefix option	power ratings				operator ambient temperature range (TS) (C°)	safety code	electrical enclosure protection (EN 60529)	replacement coil		type ⁽¹⁾
	inrush ~ (VA)	holding ~ (VA)	W	hot/cold = (W)				~ 230 V / 50 Hz	= 24 V DC	
	Basic power = BP									
SC	15	7	5	5/6,9	-25 to +60	EN 60730	moulded IP65	43004649	43004647	02
SCDU	15	7	5	5/6,9	-25 to +60	II 3 D IP65 T 135°C	moulded IP65	- ⁽⁴⁾	- ⁽⁴⁾	02
PV	-	-	6,3	-/6,9	-40 to +65/40	II 2 G/D Ex mb IIC T3/Ex mD	moulded IP65	- ⁽⁴⁾	- ⁽⁴⁾	04
Reduced power (RP)										
SC	6	3,5	2,5	2,5/3,0	-25 to +60	EN 60730	moulded IP65	43004886	43004869	01
SCDU	6	3,5	2,5	2,5/3,0	-25 to +60	II 3 D IP65 T 100°C	moulded IP65	- ⁽⁴⁾	- ⁽⁴⁾	01
PV	-	-	4	-/3,0	-40 to +65/60	II 2 G/D Ex mb II T3/Ex mD	moulded IP65	- ⁽⁴⁾	- ⁽⁴⁾	03

⁽¹⁾ Refer to the dimensional drawings on pages 4 and 5 (Air operated versions, see page 6 for types 5 and 6).

⁽⁴⁾ Multiple coil kits available under ATEX, contact us

ELECTRICAL CONNECTIONS

prefix	connection
SC, SCDU	Spade plug connector with cable gland DIN 43650, 11 mm, industry standard B, for cables with an outer diameter from 6 to 8 mm (type 01) or EN175301-803A (ISO 4400) for cables with an outer diameter from 6 to 10 mm (type 02).
PV	Moulded-in cable, standard length 2 m

ADDITIONAL OPTIONS

- Other pipe threads are available on request
- Ex mb/mD (prefix "PV") solenoid can be supplied with various cable lengths
- Compliance with "UL" Available on request (series 552-553)
- Dustproof ATEX (SCDU) with a coil and spade plug connector with lead (2 m lead), TPL 20651

INSTALLATION

- Installation/maintenance instructions are included with each valve
- The valves can be mounted in any position without affecting operation
- Do not connect the pressure supply to the exhaust port 3. The "environmentally-protected" construction is not adapted for a "distributing" function or use in NO function. Contact us for functions available in specific versions
- IEC 61508 Functional Safety (Suffix SL), allowable temperature range: -40°C to +60°C. Probability of failure on demand, contact us
- It is necessary to connect pipes or fittings to the exhaust ports to protect the internal parts of the valve if used outside or in harsh environments (dusts, liquids etc.)
- Threaded pipe connection identifier is: 8 = NPT (ANSI 1.20.3); G = G (ISO 228/1)